



WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY FWS-30 TP2

FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable.
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 Languages.
- 8 dosing signals.

G FACTOR

- High G-Factor of 200.

EFFICIENCY

- Energy Optimization.
- Optimal load.
- Low water consumption.

VERSATILITY

- Custom- Make to order.
- OPL or COIN.
- Electric or Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL and COIN.

ERGONOMICS

- Biggest door diameter: Ø373.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: for easy access to control panel parts.

Technical setting:

telemetry, error diagnosis, monitoring, software updates.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skin plate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.


OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 0.31 In drum holes.
- Anchoring base. • External double drain 3".
- Water FULL FLOW: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized coating.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Coin / token kit.
- Auto unlock kit for the door.



DRUM		U.	FWS - 30 TP2	
Load capacity 1:9 / 1:10		Lb.	30.9/28.7	
Volume		CU.FT	4.6	
Diameter		In	24.4	
Depth		In	16.9	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	53/759	
G Factor		-	200	
Maximum force transmitted		KN	2.31 ±4	
Frequency-dynamic force		Hz	8,93	
Noise level		dB	<70	
Coin laundry version		-	Yes	
Double drain		-	Opt.	
Weighing System / Tilting System		-	No	
SLUICE option		-	Yes	
DOOR				
Height center door / Height door		In	22.5/12.2	
Diameter		In	14.7	
POWER				
Motor		Hp	1.5	
Electric heating power		kW	9	
Total electric power (electric model)		kW	9.5	
Total electric power (hw, steam model)		kW	1.1	
CONNECTIONS			ELECTRIC	STEAM / HOT WATER
Voltage 208-240/60/1~ + G		Nº x AWG / A	3 x 6 / 50A	3x 14 / 15A
Voltage 208-240/60/3~ + G		Nº x AWG / A	4 x 10 / 32A	-
Voltage 440-480/3 ~ + G		Nº x AWG / A	4 x 12 / 20A	-
Steam inlet (Steam model)		inch	1/2"	
Maximum steam consumption (Steam model)		lbs/h	8,5	
Water inlet		inch	3/4"	
Water main pressure		Kg/cm2	2-4	
Maximum water consumption		Gal/h	20,8*	
Drain		mm/inch	3"	
Drainage capacity		Gal/min	52.8	
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width		In	28.31/30.8	
Net Depth / Gross Depth		In	33.70/39.0	
Net Height / Gross Height		In	45.87/55.2	
Net weight / Gross weight		Lbs.	463.1/540.2	
Volume		Ft3	38.1	

* Programmed No. 20, 75% load

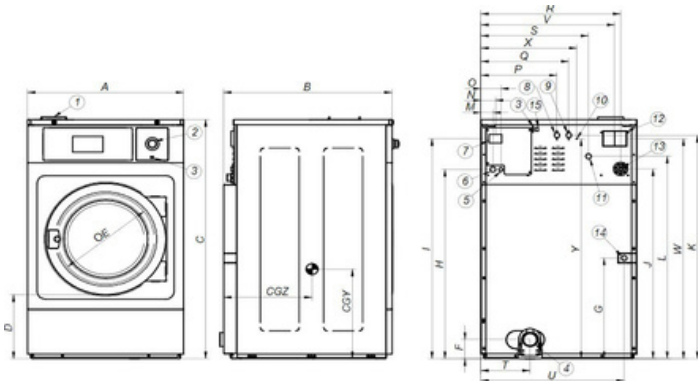

- 01. Soap dispenser
- 02. Emergency stop
- 03. USB port
- 04. Drain
- 05. Electric connection to liquid soap pump
- 06. Electrical connection
- 07. Main switch

- 08. Auxiliary water inlet
- 09. Hot water inlet
- 10. Equipotential connection
- 11. Cold water inlet
- 12. Blur output / Water overload
- 13. Liquid soap connection
- 14. Steam connection
- 15. Ethernet port

		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
FWS-30	mm	719	856	1165	310	373	143	440	886	1.054	889	1073	958	61	74	101	316	376	637	475	211	654	607	1053	416	1053	484	524
	In	28.31	33.70	45.87	12.20	14.69	5.83	17.32	34.88	41.50	35.00	42.24	37.72	2.40	2.91	3.98	12.44	14.80	25.08	18.70	8.31	25.75	23.90	41.46	16.38	41.46	19.06	20.63