


DRUM		U.	FWS -65 TP2	
Load capacity	1:9 / 1:10	Lb.	68.4/61.7	
Volume		CU.FT	9.8	
Diameter		In	30.3	
Depth		In	23	
GENERAL DETAILS				
Washing speed / Spinning speed		r.p.m.	48/682	
G Factor		-	200	
Maximum force transmitted		KN	3,68 ± 6	
Frequency-dynamic force		Hz	8,02	
Noise level		dB	<70	
Coin laundry version		-	Yes	
Double drain		-	Opt.	
Weighing System / Tilting System		-	No	
SLUICE option		-	Yes	
DOOR				
Height center door / Height door		In	27.6/15.8	
Diameter		In	18.1	
POWER				
Motor		Hp	5.4	
Electric heating power		kW	18	
Total electric power (electric model)		kW	19.2	
Total electric power (hw, steam model)		kW	4	
CONNECTIONS			ELECTRIC	STEAM / HOT WATER
Voltage 208-240/60/1~ + G	Nº x AWG / A		-	3 x 12 /20A
Voltage 230/3~ + G	Nº x AWG / A		4 x 5 / 60A	4 x 12 / 20A
Voltage 440-480/3 ~ + G	Nº x AWG / A		4 x 8 / 40A	-
Steam inlet (Steam model)	inch	3/4"		
Maximum steam consumption (Steam model)	lbs/h	15		
Water inlet	inch	3/4"		
Water main pressure	Kg/cm2	2-4		
Maximum water consumption	Gal/h	43.5*		
Drain	mm/inch	3"		
Drainage capacity	Gal/min	52.8		
DIMENSIONS / PACKING DIMENSIONS				
Net Width / Gross Width	In	34.80/37.2		
Net Depth / Gross Depth	In	42.75/48.5		
Net Height / Gross Height	In	52.76/62.4		
Net weight / Gross weight	Lbs.	888.6/950.4		
Volume	Ft3	65		

* Programmed No. 20, 75% load



		A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	V	W	X	Y	CGY	CGZ
FWS-65	mm	884	1075	1340	400	460	149	548	1063	1230	1065	1250	1135	61	74	101	430	510	801	640	268	820	772	1220	570	1210	591	593
	In	34.80	42.75	52.76	15.75	18.11	5.87	21.57	41.85	48.43	41.93	49.21	44.68	2.40	2.91	3.98	16.93	20.08	31.54	25.20	10.55	32.28	30.39	48.03	22.40	47.64	23.27	23.35

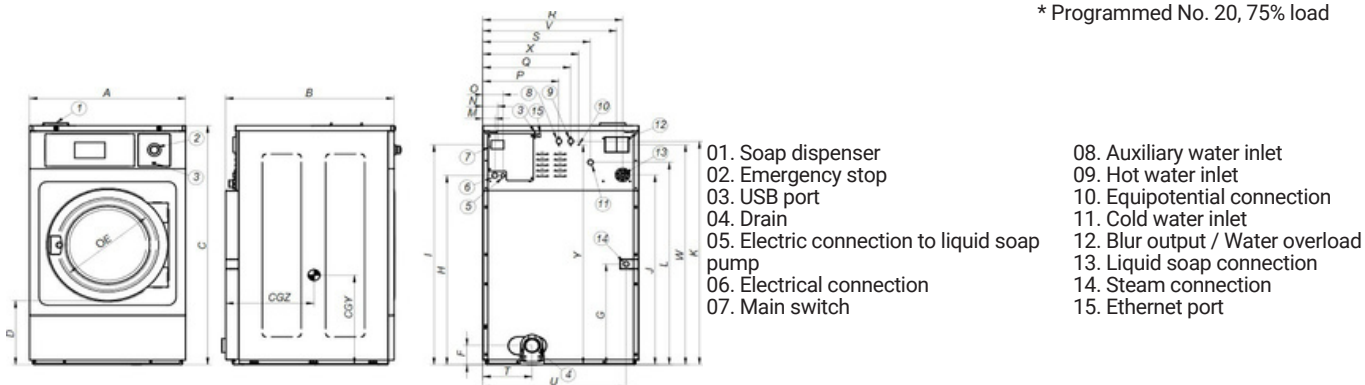

WASHING

NORMAL SPIN WASHERS LOW AND MEDIUM CAPACITY FWS - 65 TP2



FEATURES

Touch Plus Control

- 7" touchscreen, user friendly and totally programmable.
- Videos on display, ads, instructions.
- Free software for programming, telemetry, data analysis.
- USB Connection.
- 37 Languages.
- 8 dosing signals.

G FACTOR

- G-FACTOR 200.

EFFICIENCY

- Energy Optimization.
- Optimal load.
- Low water consumption.

VERSATILITY

- Custom- Make to order.
- OPL or COIN.
- Electric or Hot water.
- Wet cleaning features.

CONNECTIVITY

- IoT - Fagor-Konnect standard.
- Remote technical service.
- Laundry Management system: OPL and COIN.

ERGONOMICS

- Biggest door diameter: Ø460.
- Easy opening/closing system for door lock.

MAINTENANCE

- Hinged panel: easy and ergonomic access.
- Equivalent parts for all models: contactors, electronic devices,...
- Technical menu: telemetry, error diagnosis.

OTHERS

- Hard mounted washers.
- Anchoring to floor with anchoring base.
- Panels in skin plate.
- Drum and tub in stainless steel AISI 304
- 3 water inlets.
- CB and WRAS approved product Option ETL.

OPTIONS

- DQ-2 Dosing pump kit.
- Extra dosing pump DB-1.
- SLUICE: model with 0.31 In drum holes.
- Anchoring base.
- Double drain.
- Normally closed valve.
- Water RE-CYCLE: recirculation of bath water.
- Relay card with 6 extra dosing signals: up to 14 signals.
- Silicone gasket.
- Reversible door opening.
- Tropicalized coating.
- Steam kit to transform an E or HW heated machine into steam version.
- Stainless steel AISI 304 outer casing.
- Stainless steel AISI 304 front panel.
- Coin / token kit.
- Auto unlock kit for the door.